


Insulation Requirements for Firetex Double Sided Wrap Around A60 / H120 Rated Pipe Penetration Seals

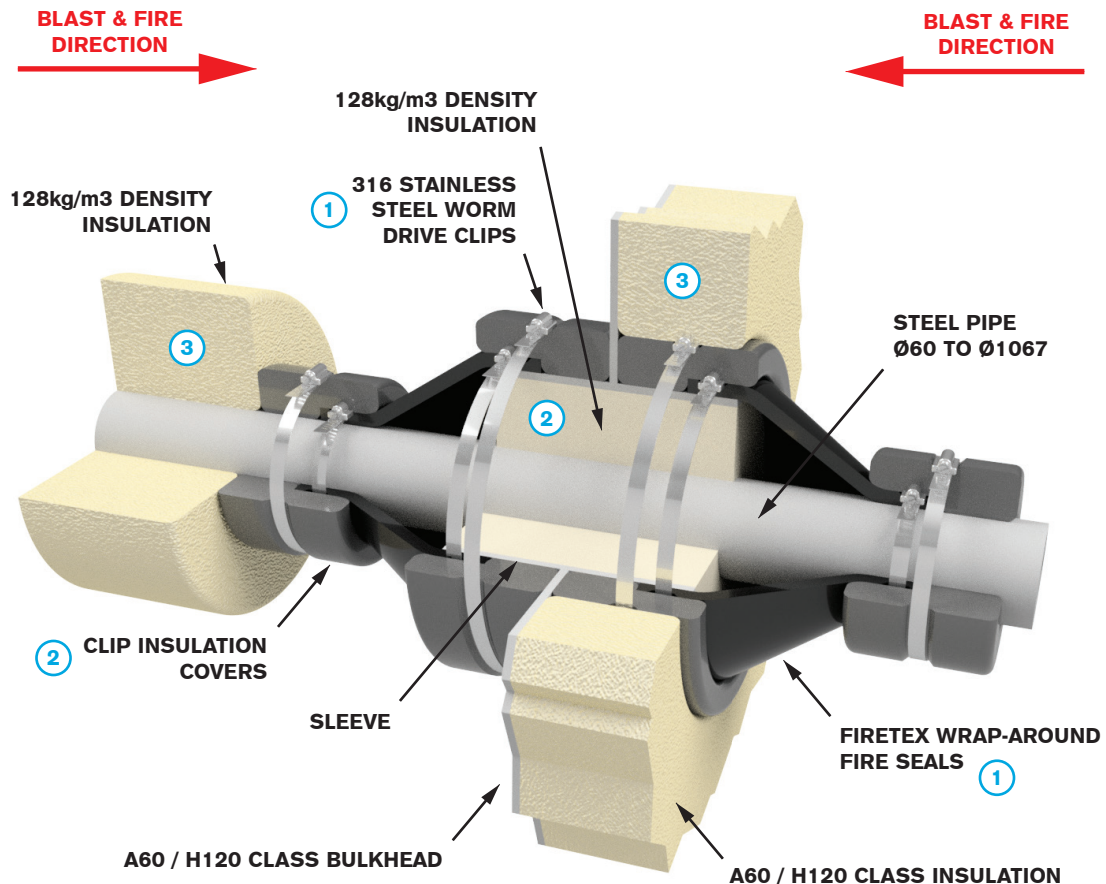

- ① PROVIDED BY MCL UNITEX LTD.
- ② CAN BE PROVIDED ON SPECIAL REQUEST.
- ③ PROVIDED BY OTHERS.

www.mclunitex.com

Specification

Certification:	A60 and H120 Lloyds Register of Shipping, Certificate No. SAS F150136. Blast over-pressure to 1.35 bar g, Lloyds Register of Shipping Certificate No. LWT 401087/1 (Approvals are also held through other Certifying Authorities, details of which are available upon request).
Insulation:	Insulation in accordance with Lloyds Register of Shipping, Certificate No. SAS F150136.
Movement:	Standard seal construction will accommodate +/- 25mm in any plane.
Installation:	Each seal is supplied with installation instructions, sealant and stainless steel worm drive clips.